



PRODUCT SPECIFICATION

AISCAN BMPG - 35

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN	
AISCAN-BMPG-310	METALLIC	HOT DIP GALVANISED	100	35	388	12		
AISCAN-BMPG-315	"	"	150	35	293	12		
AISCAN-BMPG-320	"	"	200	35	435	12		
AISCAN-BMPG-330	"	"	300	35	411	6		
EDITION DATE	EDITION NUMBER	CARD NUMBER						
2013/10	2	EP-BMPG 35						

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006	
DESCRIPTION:	MESH CABLE TRAY HOT DIP GALVANISED.
COATING:	HOT DIP GALVANISED IN ACCORDING TO UNE-EN ISO 1461:2010
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 6
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

OBSERVATIONS
FOR THE UNION BETWEEN BRACKETS WILL BE REQUIRED THE USE OF 2 TO 4 SETS OF UNION (CUBS), DEPENDING THE WIDTH OF THE TRAY.
WITH ALL EDGES ROUNDED.
ACCESORIOS
TRAY ATTACHMENT ASSEMBLY (CUB) UNIVERSAL MESH CABLE TRAY COVER (TUBC) OMEGA BRACKET (SO)


THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.



PRODUCT SPECIFICATION

AISCAN BMPG - 60

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN	
							3000	100
AISCAN-BMPG-606	METALLIC	HOT DIP GALVANISED	60	60	347	24		
AISCAN-BMPG-610	"	"	100	60	529	12		
AISCAN-BMPG-615	"	"	150	60	411	12		
AISCAN-BMPG-620	"	"	200	60	717	12		
AISCAN-BMPG-630	"	"	300	60	494	6		
AISCAN-BMPG-640	"	"	400	60	706	6		
AISCAN-BMPG-650	"	"	500	60	553	6		
AISCAN-BMPG-660	"	"	600	60	459	6		

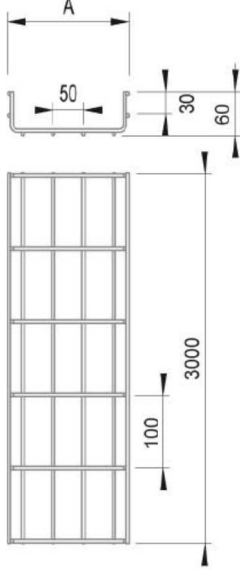

EDITION DATE	EDITION NUMBER	CARD NUMBER
2013/10	2	EP-BMPG 60

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006

DESCRIPTION:	MESH CABLE TRAY HOT DIP GALVANISED.
COATING:	HOT DIP GALVANISED IN ACCORDING TO UNE-EN ISO 1461:2010
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 6
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

OBSERVATIONS

FOR THE UNION BETWEEN BRACKETS WILL BE REQUIRED THE USE OF 2 TO 4 SETS OF UNION (CUBS), DEPENDING THE WIDTH OF THE TRAY.

WITH ALL EDGES ROUNDED.

ACCESORIES

TRAY ATTACHMENT ASSEMBLY (CUB)
UNIVERSAL MESH CABLE TRAY COVER (TUBC)
OMEGA BRACKET (SO)

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.



PRODUCT SPECIFICATION

AISCAN BMPG - 100

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN
AISCAN-BMPG-1020	METALLIC	HOT DIP GALVANISED	200	100	847	12	
AISCAN-BMPG-1030	"	"	300	100	990	6	
AISCAN-BMPG-1040	"	"	400	100	952	6	
AISCAN-BMPG-1050	"	"	500	100	576	6	
AISCAN-BMPG-1060	"	"	600	100	529	6	

EDITION DATE	EDITION NUMBER	CARD NUMBER
2013/10	2	EP-BMPG 100

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006

DESCRIPTION:	MESH CABLE TRAY HOT DIP GALVANISED.
COATING:	HOT DIP GALVANISED IN ACCORDING TO UNE-EN ISO 1461:2010
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 6
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

OBSERVATIONS

FOR THE UNION BETWEEN BRACKETS WILL BE REQUIRED THE USE OF 2 TO 4 SETS OF UNION (CUBS), DEPENDING THE WIDTH OF THE TRAY.

WITH ALL EDGES ROUNDED.

ACCESORIOS

TRAY ATTACHMENT ASSEMBLY (CUB)
UNIVERSAL MESH CABLE TRAY COVER (TUBC)
OMEGA BRACKET (SO)

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.