




# PRODUCT SPECIFICATION

## AISCAN BMPI - 35

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN	
							EDITION DATE	EDITION NUMBER
AISCAN-BMPI-310	STAINLESS STEEL	-	100	35	365	12		
AISCAN-BMPI-315	"	-	150	35	356	12		
AISCAN-BMPI-320	"	-	200	35	405	12		
AISCAN-BMPI-330	"	-	300	35	405	6		

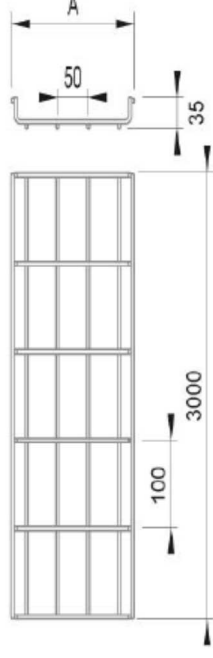

### CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006

DESCRIPTION:	MESH CABLE TRAY STAINLESS STEEL.
COATING:	STAINLESS STEEL, AISI 304
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 9A
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

### OBSERVATIONS

FOR THE UNION BETWEEN BRACKETS WILL BE REQUIRED THE USE OF 2 TO 4 SETS OF UNION (CUBS), DEPENDING THE WIDTH OF THE TRAY.

WITH ALL EDGES ROUNDED.

### ACCESORIES

TRAY ATTACHMENT ASSEMBLY (CUB)  
UNIVERSAL MESH CABLE TRAY COVER (TUBC)  
OMEGA BRACKET (SO)

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.



# PRODUCT SPECIFICATION

## AISCAN BMPI - 60

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN
AISCAN-BMPI-606	STAINLESS STEEL	-	60	60	338	24	
AISCAN-BMPI-610	"	-	100	60	411	12	
AISCAN-BMPI-615	"	"	150	60	338	12	
AISCAN-BMPI-620	"	"	200	60	423	12	
AISCAN-BMPI-630	"	"	300	60	358	6	
AISCAN-BMPI-640	"	"	400	60	388	6	
AISCAN-BMPI-650	"	"	500	60	351	6	
AISCAN-BMPI-660	"	"	600	60	315	6	

EDITION DATE	EDITION NUMBER	CARD NUMBER
2013/10	2	EP-BMPI 60

### CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006

DESCRIPTION:	MESH CABLE TRAY STAINLESS STEEL.
COATING:	STAINLESS STEEL, AISI 304
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 9A
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

### OBSERVATIONS

FOR THE UNION BETWEEN BRACKETS WILL BE REQUIRED THE USE OF 2 TO 4 SETS OF UNION (CUBS), DEPENDING THE WIDTH OF THE TRAY.

WITH ALL EDGES ROUNDED.

### ACCESORIES

TRAY ATTACHMENT ASSEMBLY (CUB)  
UNIVERSAL MESH CABLE TRAY COVER (TUBC)  
OMEGA BRACKET (SO)

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.



# PRODUCT SPECIFICATION

## AISCAN BMPI - 100

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN
AISCAN-BMPI-1020	STAINLESS STEEL	-	200	100	671	12	
AISCAN-BMPI-1030	"	-	300	100	406	6	
AISCAN-BMPI-1040	"	-	400	100	315	6	
AISCAN-BMPI-1050	"	-	500	100	324	6	
AISCAN-BMPI-1060	"	-	600	100	306	6	
EDITION DATE	EDITION NUMBER	CARD NUMBER					
2013/10	2	EP-BMPI 100					

### CHARACTERISTICS ACCORDING TO STANDARD

#### IEC 61537:2006

DESCRIPTION:	MESH CABLE TRAY STAINLESS STEEL.
COATING:	STAINLESS STEEL, AISI 304
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 9A
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

### OBSERVATIONS

FOR THE UNION BETWEEN BRACKETS WILL BE REQUIRED THE USE OF 2 TO 4 SETS OF UNION (CUBS), DEPENDING THE WIDTH OF THE TRAY.

WITH ALL EDGES ROUNDED.

### ACCESORIES

TRAY ATTACHMENT ASSEMBLY (CUB)  
UNIVERSAL MESH CABLE TRAY COVER (TUBC)  
OMEGA BRACKET (SO)

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.