


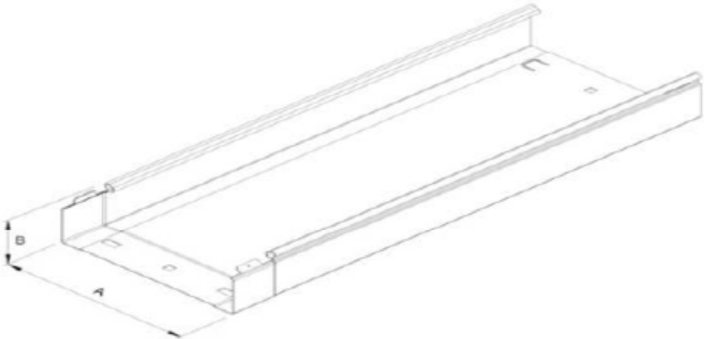

PRODUCT SPECIFICATION

AISCAN CMCG (CABLE TRAY 35) CERTIFIED RANGE

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN
							
AISCAN-CMCG-310C	METALLIC	HOT DIP GALVANISED	100	35	990	6	
AISCAN-CMCG-315C	"	"	150	35	990	6	
AISCAN-CMCG-320C	"	"	200	35	990	6	
AISCAN-CMCG-330C	"	"	300	35	675	6	
EDITION DATE	EDITION NUMBER	CARD NUMBER					
2014/02	3	EP-CMCGC 35					

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006

DESCRIPTION:	BLIND CABLE TRAY HOT DIP GALVANISED – CERTIFIED RANGE
COATING:	HOT DIP GALVANISED IN ACCORDING TO UNE-EN ISO 1461:2010
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 7
LEVEL DRILLING:	TYPE A
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

OBSERVATIONS

PLUG SYSTEM BETWEEN SECTIONS, NOT NECESSARY SCREWS OR OTHER ACCESSORIES TO ATACH EACH OTHER SECTIONS.

ACCESORIES


UNIVERSAL CABLE TRAY COVER (TUBC)
REINFORCED ANGLE BRACKET (ESCR)
BRANCHING ITEMS (CH9, TCH9, CH4, TCH4, CV9, TCV9, CV4, TCV4, CX9, TCX9, CX4, TCX4, DHT, TDHT, CRC, TCRC, DC, TDC Y TEC).

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.



PRODUCT SPECIFICATION

AISCAN CMCG (CABLE TRAY 60) CERTIFIED RANGE

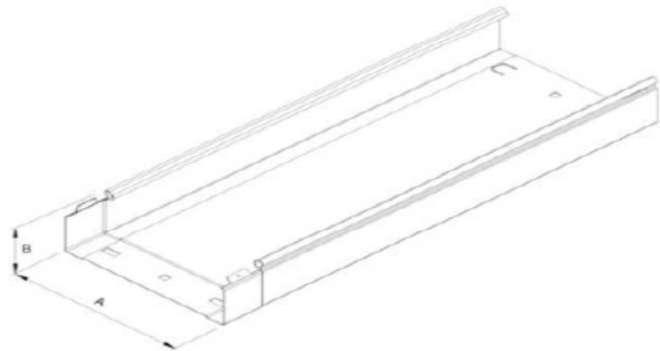TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN
							
AISCAN-CMCG-610C	METALLIC	HOT DIP GALVANISED	100	60	1467	6	
AISCAN-CMCG-615C	"	"	150	60	1080	6	
AISCAN-CMCG-620C	"	"	200	60	1350	6	
AISCAN-CMCG-630C	"	"	300	60	635	6	
AISCAN-CMCG-640C	"	"	400	60	630	6	
AISCAN-CMCG-650C	"	"	500	60	855	6	
AISCAN-CMCG-660C	"	"	600	60	855	6	
EDITION DATE	EDITION NUMBER	CARD NUMBER					
2014/02	3	EP-CMCGC 60					

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006	
DESCRIPTION:	BLIND CABLE TRAY HOT DIP GALVANISED – CERTIFIED RANGE
COATING:	HOT DIP GALVANISED IN ACCORDING TO UNE-EN ISO 1461:2010
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 7
LEVEL DRILLING:	TYPE A
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

OBSERVATIONS
PLUG SYSTEM BETWEEN SECTIONS, NOT NECESSARY SCREWS OR OTHER ACCESSORIES TO ATACH EACH OTHER SECTIONS.
ACCESORIES
UNIVERSAL CABLE TRAY COVER (TUBC) REINFORCED ANGLE BRACKET (ESCR) BRANCHING ITEMS (CH9, TCH9, CH4, TCH4, CV9, TCV9, CV4, TCV4, CX9, TCX9, CX4, TCX4, DHT, TDHT, CRC, TCRC, DC, TDC Y TEC).

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.



PRODUCT SPECIFICATION

AISCAN CMCG (CABLE TRAY 80) CERTIFIED RANGE

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN
AISCAN-CMCG-810C	METALLIC	HOT DIP GALVANISED	100	80	1248	6	
AISCAN-CMCG-815C	"	"	150	80	1170	6	
AISCAN-CMCG-820C	"	"	200	80	1350	6	
AISCAN-CMCG-830C	"	"	300	80	647	6	
AISCAN-CMCG-840C	"	"	400	80	675	6	
AISCAN-CMCG-850C	"	"	500	80	720	6	
AISCAN-CMCG-860C	"	"	600	80	720	6	
EDITION DATE	EDITION NUMBER	CARD NUMBER					
2014/02	2	EP-CMCGC 80					

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006

DESCRIPTION:	BLIND CABLE TRAY HOT DIP GALVANISED – CERTIFIED RANGE
COATING:	HOT DIP GALVANISED IN ACCORDING TO UNE-EN ISO 1461:2010
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 7
LEVEL DRILLING:	TYPE A
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

OBSERVATIONS

PLUG SYSTEM BETWEEN SECTIONS, NOT NECESSARY SCREWS OR OTHER ACCESSORIES TO ATTACH EACH OTHER SECTIONS.

ACCESORIES

UNIVERSAL CABLE TRAY COVER (TUBC)
 REINFORCED ANGLE BRACKET (ESCR)
 BRANCHING ITEMS (CH9, TCH9, CH4, TCH4,
 CV9, TCV9, CV4, TCV4, CX9, TCX9, CX4, TCX4,
 DHT, TDHT, CRC, TCRC, DC, TDC Y TEC).

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.



PRODUCT SPECIFICATION

AISCAN CMCG (CABLE TRAY 100) CERTIFIED RANGE

TYPE	MATERIAL	COATING	A	B	ALLOWABLE WORKING LOAD (N/m)	PACKING (meters)	PLAIN
AISCAN-CMCG-1010C	METALLIC	HOT DIP GALVANISED	100	100	1473	6	
AISCAN-CMCG-1015C	"	"	150	100	1143	6	
AISCAN-CMCG-1020C	"	"	200	100	1350	6	
AISCAN-CMCG-1030C	"	"	300	100	720	6	
AISCAN-CMCG-1040C	"	"	400	100	720	6	
AISCAN-CMCG-1050C	"	"	500	100	720	6	
AISCAN-CMCG-1060C	"	"	600	100	765	6	
EDITION DATE	EDITION NUMBER	CARD NUMBER					
2014/02	3	EP-CMCGC 100					

CHARACTERISTICS ACCORDING TO STANDARD IEC 61537:2006	
DESCRIPTION:	BLIND CABLE TRAY HOT DIP GALVANISED – CERTIFIED RANGE
COATING:	HOT DIP GALVANISED IN ACCORDING TO UNE-EN ISO 1461:2010
MATERIAL:	METALLIC
ELECTRICAL CONTINUITY:	YES
FLAME PROPAGATE:	NO
OPERATING TEMPERATURE RANGE:	-40 °C / 150 °C
RESISTANCE TO CORROSION:	TYPE 7
LEVEL DRILLING:	TYPE A
IMPACT RESISTANCE:	20 J TO -40 °C
ALLOWABLE WORKING LOAD (CTA):	DISTANCE BETWEEN SUPPORTS (1,5 METERS)

OBSERVATIONS
PLUG SYSTEM BETWEEN SECTIONS, NOT NECESSARY SCREWS OR OTHER ACCESSORIES TO ATACH EACH OTHER SECTIONS.
ACCESORIES
UNIVERSAL CABLE TRAY COVER (TUBC) REINFORCED ANGLE BRACKET (ESCR) BRANCHING ITEMS (CH9, TCH9, CH4, TCH4, CV9, TCV9, CV4, TCV4, CX9, TCX9, CX4, TCX4, DHT, TDHT, CRC, TCRC, DC, TDC Y TEC).

THE INSTALLATION OF THIS PRODUCT WILL BE CARRIED OUT ACCORDING TO THE R.E.B.T.